





Pendant Linear Luminaires

CE EN 60598-2-2 IP 40



Code	VK117 120LED S
Power (W)	26
Light Flux (lm)	2400
Light Source	FLEXIBLE LED
Color Temp	FLEXIBLE LED
Dimensions (W/L/H mm)	70x1200x10
Cut Out (W/L/H mm)	-
Weight (Kg)	-
Housing	Aluminium
Paint	Electrostatic Powder Coated
Balast	Vde Approved Driver
Diffuser	Opal PMMA Diffuser
Mounted	Pendant

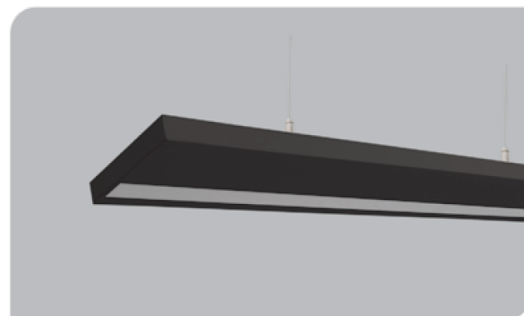

Code	Power (W)	Light Flux (lm)	Light Source	Color Temp	Dimensions (W/L/H mm)	Cut Out (W/L/H mm)	Weight (Kg)
VK117 100LED S	22	2000	FLEXIBLE LED	2700-3000K	70x1000x10	-	-
VK117 120LED S	26	2400	FLEXIBLE LED	2700-3000K	70x1200x10	-	-
VK117 150LED S	33	3000	FLEXIBLE LED	2700-3000K	70x1500x10	-	-