






## Recessed Linear Luminaire

CE EN 60598-2-2 IP 40



|                       |                             |
|-----------------------|-----------------------------|
| Code                  | VK109 150LED                |
| Power (W)             | 28,5                        |
| Light Flux (lm)       | 3450                        |
| Light Source          | SMD LED                     |
| Color Temp            | SMD LED                     |
| Dimensions (W/L/H mm) | 100x1520x80                 |
| Cut Out (W/L/H mm)    | 90x1500x100                 |
| Weight (Kg)           | -                           |
| Housing               | Aluminium                   |
| Paint                 | Electrostatic Powder Coated |
| Balast                | Vde Approved Driver         |
| Diffuser              | Opal PMMA Diffuser          |
| Mounted               | Recessed                    |

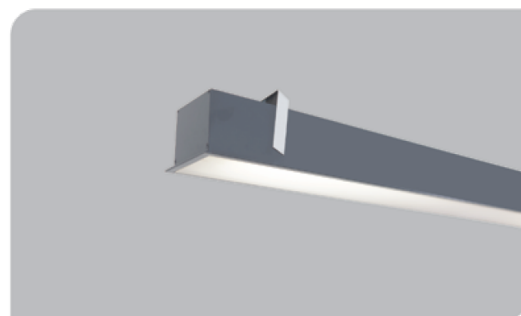

| Code         | Power (W) | Light Flux (lm) | Light Source | Color Temp | Dimensions (W/L/H mm) | Cut Out (W/L/H mm) | Weight (Kg) |
|--------------|-----------|-----------------|--------------|------------|-----------------------|--------------------|-------------|
| VK109 100LED | 19        | 2300            | SMD LED      | 3000-4000K | 100x1020x80           | 90x1000x100        | -           |
| VK109 120LED | 23        | 2750            | SMD LED      | 3000-4000K | 100x1220x80           | 90x1200x100        | -           |
| VK109 150LED | 28,5      | 3450            | SMD LED      | 3000-4000K | 100x1520x80           | 90x1500x100        | -           |