





## Architectural Pendant Luminaires

CE EN 60598-2-2 IP 40      

|                       |                             |
|-----------------------|-----------------------------|
| Code                  | VK125 060LED K              |
| Power (W)             | 35                          |
| Light Flux (lm)       | 4000                        |
| Light Source          | SMD LED                     |
| Color Temp            | SMD LED                     |
| Dimensions (W/L/H mm) | 200x600x85                  |
| Cut Out (W/L/H mm)    | -                           |
| Weight (Kg)           | -                           |
| Housing               | Aluminium                   |
| Paint                 | Electrostatic Powder Coated |
| Balast                | Vde Approved Driver         |
| Diffuser              | Opal PMMA Diffuser          |
| Mounted               | Surface - Pendant           |

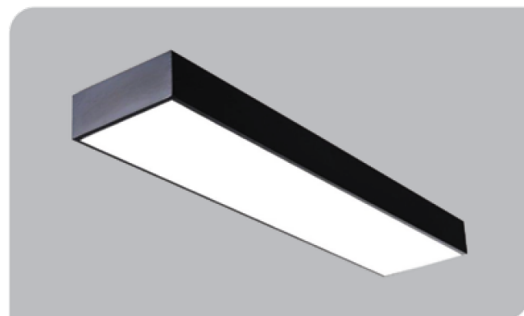

| Code           | Power (W) | Light Flux (lm) | Light Source | Color Temp | Dimensions (W/L/H mm) | Cut Out (W/L/H mm) | Weight (Kg) |
|----------------|-----------|-----------------|--------------|------------|-----------------------|--------------------|-------------|
| VK125 060LED K | 35        | 4000            | SMD LED      | 3000-4000K | 200x600x85            | -                  | -           |
| VK125 120LED K | 75        | 9000            | SMD LED      | 3000-4000K | 200x1200x85           | -                  | -           |