





## Architectural Pendant Luminaires

CE EN 60598-2-2 IP 40       

Code	VK125 120LED K
Power (W)	75
Light Flux (lm)	9000
Light Source	SMD LED
Color Temp	SMD LED
Dimensions (W/L/H mm)	200X1200X85
Cut Out (W/L/H mm)	-
Weight (Kg)	-
Housing	Aluminium
Paint	Electrostatic Powder Coated
Balast	Vde Approved Driver
Diffuser	Opal PMMA Diffuser
Mounted	Surface - Pendant

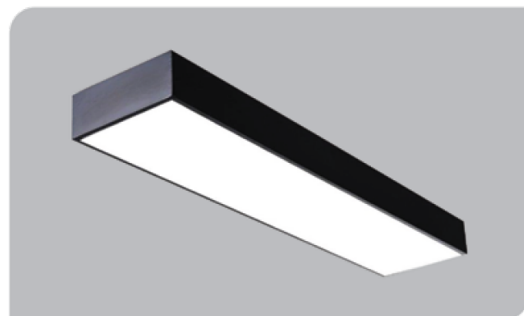

Code	Power (W)	Light Flux (lm)	Light Source	Color Temp	Dimensions (W/L/H mm)	Cut Out (W/L/H mm)	Weight (Kg)
VK125 060LED K	35	4000	SMD LED	3000-4000K	200x600x85	-	-
VK125 120LED K	75	9000	SMD LED	3000-4000K	200X1200X85	-	-