






Recessed Spotlights

CE EN 60598-2-2 IP 40



| | |
|-----------------------|-----------------------------|
| Code | VK126 155LED |
| Power (W) | 23 |
| Light Flux (lm) | 2300 |
| Light Source | SMD |
| Color Temp | SMD |
| Dimensions (W/L/H mm) | 400x100 |
| Cut Out (W/L/H mm) | 380x100 |
| Weight (Kg) | - |
| Housing | Dkp Sheet |
| Paint | Metal Outer Frame |
| Balast | Electrostatic Powder Coated |
| Diffuser | Vde Approved Driver |
| Mounted | Opal PMMA Diffuser |

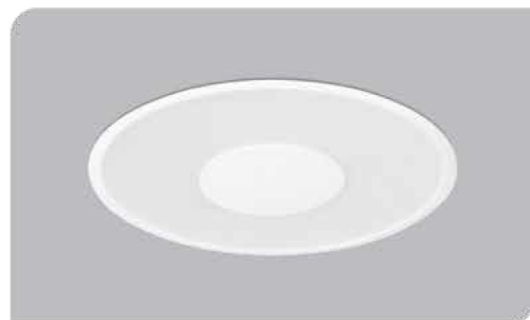

| Code | Power (W) | Light Flux (lm) | Light Source | Color Temp | Dimensions (W/L/H mm) | Cut Out (W/L/H mm) | Weight (Kg) |
|--------------|-----------|-----------------|--------------|------------|-----------------------|--------------------|-------------|
| VK126 155LED | 23 | 2300 | SMD | 3000-4000K | 400x100 | 380x100 | - |