






Surface Mounted Linear Luminaires

CE EN 60598-2-2 IP 40



| | |
|-----------------------|-----------------------------|
| Code | VK212 100LED |
| Power (W) | 19 |
| Light Flux (lm) | 2300 |
| Light Source | SMD LED |
| Color Temp | SMD LED |
| Dimensions (W/L/H mm) | 65x1000x85 |
| Cut Out (W/L/H mm) | - |
| Weight (Kg) | - |
| Housing | Aluminium |
| Paint | Electrostatic Powder Coated |
| Balast | Vde Approved Driver |
| Diffuser | Opal PMMA Diffuser |
| Mounted | Surface |

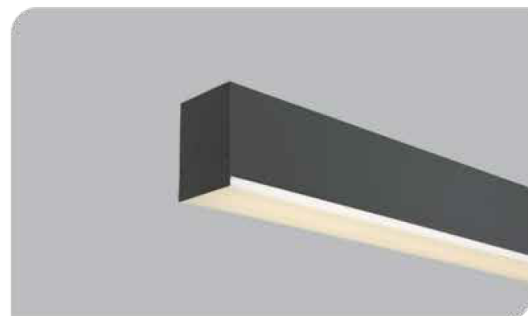

| Code | Power (W) | Light Flux (lm) | Light Source | Color Temp | Dimensions (W/L/H mm) | Cut Out (W/L/H mm) | Weight (Kg) |
|--------------|-----------|-----------------|--------------|------------|-----------------------|--------------------|-------------|
| VK212 100LED | 19 | 2300 | SMD LED | 3000-4000K | 65x1000x85 | - | - |
| VK212 120LED | 23 | 2750 | SMD LED | 3000-4000K | 65x1200x85 | - | - |
| VK212 150LED | 28,5 | 3450 | SMD LED | 3000-4000K | 65x1500x85 | - | - |