







## Pendant Linear Luminaires

CE EN 60598-2-2 IP 40



|                       |                                  |
|-----------------------|----------------------------------|
| Code                  | VK303 114LED-OPT S               |
| Power (W)             | 53                               |
| Light Flux (lm)       | 7400                             |
| Light Source          | SMD                              |
| Color Temp            | SMD                              |
| Dimensions (W/L/H mm) | 65x1400x85                       |
| Cut Out (W/L/H mm)    | -                                |
| Weight (Kg)           | -                                |
| Housing               | Aluminium                        |
| Paint                 | Electrostatic Powder Coated      |
| Balast                | Vde Approved Driver              |
| Diffuser              | Clear - Translucent Optical PMMA |
| Mounted               | Pendant                          |

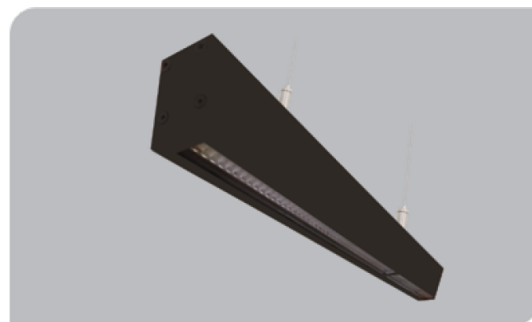

| Code                  | Power (W) | Light Flux (lm) | Light Source | Color Temp | Dimensions (W/L/H mm) | Cut Out (W/L/H mm) | Weight (Kg) |
|-----------------------|-----------|-----------------|--------------|------------|-----------------------|--------------------|-------------|
| VK303 112LED-OPT 35 S |           | 4600            | SMD          | 3000-4000K | 65x1200x85            | -                  | -           |
| VK303 114LED-OPT 53 S |           | 7400            | SMD          | 3000-4000K | 65x1400x85            | -                  | -           |