






Pendant Linear Luminaires

CE EN 60598-2-2 IP 20

| | |
|-----------------------|-----------------------------|
| Code | VK110 120LED RS |
| Power (W) | 23 |
| Light Flux (lm) | 2750 |
| Light Source | SMD LED |
| Color Temp | SMD LED |
| Dimensions (W/L/H mm) | 85x1200x80 |
| Cut Out (W/L/H mm) | - |
| Weight (Kg) | - |
| Housing | Aluminium |
| Paint | Electrostatic Powder Coated |
| Balast | Vde Approved Driver |
| Diffuser | Reflector |
| Mounted | Pendant |

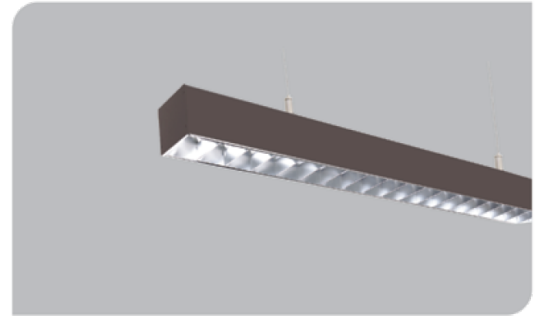

| Code | Power (W) | Light Flux (lm) | Light Source | Color Temp | Dimensions (W/L/H mm) | Cut Out (W/L/H mm) | Weight (Kg) |
|-----------------|-----------|-----------------|--------------|------------|-----------------------|--------------------|-------------|
| VK110 100LED RS | 19 | 2300 | SMD LED | 3000-4000K | 85x1000x80 | - | - |
| VK110 120LED RS | 23 | 2750 | SMD LED | 3000-4000K | 85x1200x80 | - | - |
| VK110 150LED RS | 28,5 | 3450 | SMD LED | 3000-4000K | 85x1500x80 | - | - |