






## Pendant Linear Luminaires

CE EN 60598-2-2 IP 40      

Code	VK202 100LED S
Power (W)	38
Light Flux (lm)	4600
Light Source	SMD LED
Color Temp	SMD LED
Dimensions (W/L/H mm)	20x1000x120
Cut Out (W/L/H mm)	-
Weight (Kg)	-
Housing	Aluminium
Paint	Electrostatic Powder Coated
Balast	Vde Approved Driver
Diffuser	Opal PMMA Diffuser
Mounted	Pendant

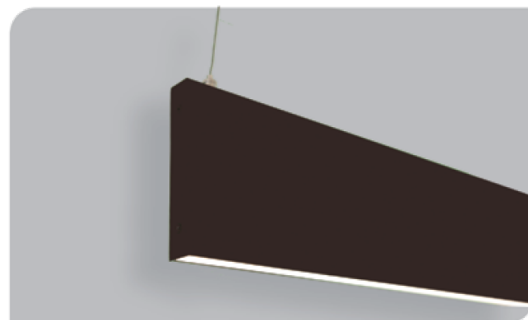

Code	Power (W)	Light Flux (lm)	Light Source	Color Temp	Dimensions (W/L/H mm)	Cut Out (W/L/H mm)	Weight (Kg)
VK202 100LED S	38	4600	SMD LED	3000-4000K	20x1000x120	-	-
VK202 120LED S	45,5	5500	SMD LED	3000-4000K	20x1200x120	-	-
VK202 150LED S	57	6900	SMD LED	3000-4000K	20x1500x120	-	-